


OF302-4MD2 (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400 ³⁾	3x440 ³⁾		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60		
	kW	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44		
Displacement ³⁾	l/min	108	138	138	108	138	108	138	108	138		
	CFM	3.81	4.87	4.87	3.81	4.87	3.81	4.87	3.81	4.87		
FAD @ 8 bar ³⁾	l/min	38	44	44	38	44	38	44	38	44		
	CFM	1.34	1.55	1.55	1.34	1.55	1.34	1.55	1.34	1.55		
Max. pressure	bar	8	8	8	8	8	8 ¹⁾	8 ¹⁾	8	8		
	psi	120	120	120	120	120	120 ¹⁾	120 ¹⁾	120	120		
Max. current	A	7.5	8.7	6.6	4.1	4.6	3.4	4.1	1.4	1.4		
Tank size	litres	4	4	4	4	4	4	4	4	4		
	gallon	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1		
Weight	kg	52	52	52	52	52	52	52	52	52		
	lbs	115	115	115	115	115	115	115	115	115		
Noise level	dB(A)/1m	47	48	48	47	48	47	48	47	48		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

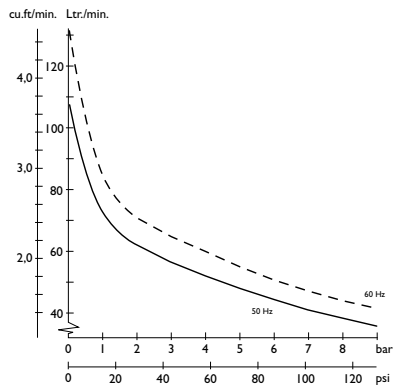

Dimensions (l x w x h)
711 x 452 x 420 mm / 28 x 17⁶/₈ x 16⁴/₈ inch

¹⁾ Available for operation at a maximum pressure of 10 bar / 145 psi upon request. Please note that operation at higher pressure will influence the lifetime.

²⁾ Neutral is required in installation

³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com

